MOD3-Manual/说明书

Specification/产品规格

Product Size/产品尺寸	252MM(W)×648MM(D)×621MM(H)/252MM(宽)×648MM(深)×621(高)
Material/材质	2.0+2.5MM/Aluminum Magnesium Alloy/2.0+2.5MM铝镁合金架构
	Tempered Glass 4MM /钢化玻璃 4MM
Main Board Type /主板兼容	ITX、M-ATX、ATX、E-ATX
HDD/SSD/硬盘位	2.5SSD×2、3.5HDD×1 /2.5SSD×3
Front I/O Prot/前I/O端口	USB3.0×2、AUDIO×1、MIC×1
Power Support/电源	Standard ATX、the length of PSU should be within 195mm /标准ATX、电源长度支持195MM
Radiator/CPU散热器	Height up to 170MM/散热器最高170MM
Video Card/显卡	Length up to 400MM/显卡支持400MM
PCI Slot/PCI拓展槽	7
FAN/风扇 (Fan is not built-in) (风扇非标配)	top/顶：120MM×3/240水冷/360水冷/240 Radiator/360 Radiator
	In front/前：120MM×3/240水冷/240 Radiator
Weight/重量	Net/净重：8KG

Accessories/Screws/配件包

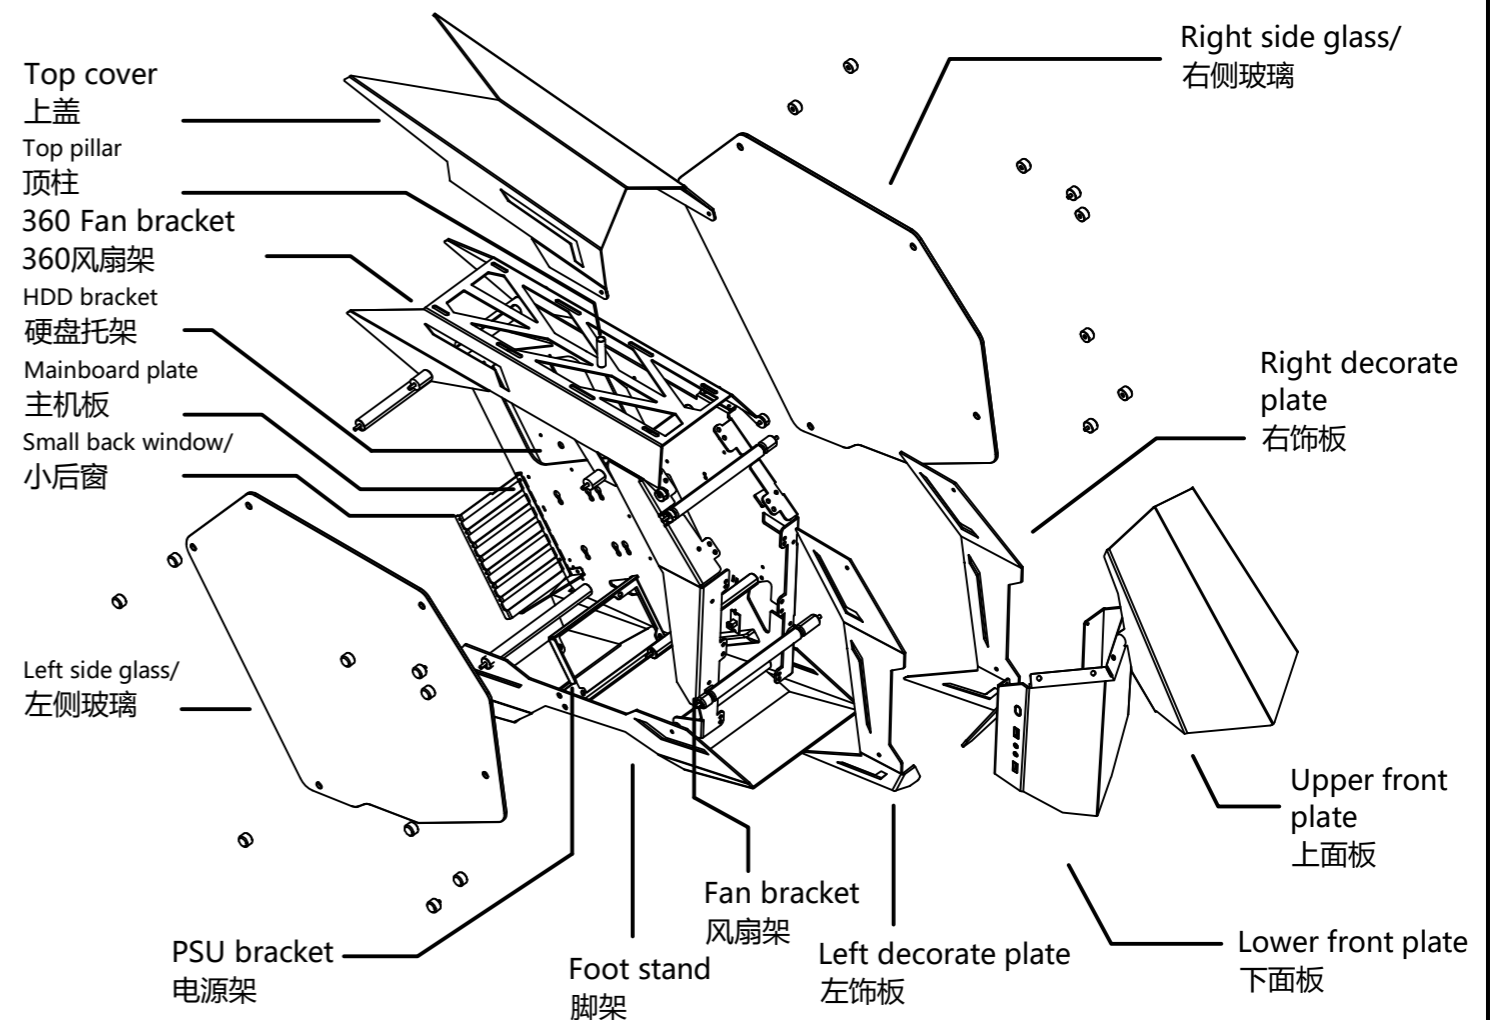|					
	2.5SSD硬盘螺丝/SSD screw	8PCS		电源×4/主板×10/显卡×7/PSU x 4 /Mainboard x 10/Video Card×7	21PCS
	2.5HDD橡胶垫片/Rubber gasket	9PCS		红滑丝垫片/Red slipped gasket	15PCS
	六角铜柱/Hexagon pillars	1PCS		3.5SSD硬盘螺丝/HDD screw	4PCS
	束线带/Cable ties	8PCS		2.5SSD硬盘螺丝/2.5/SSD screw	4PCS

Connector/连接说明

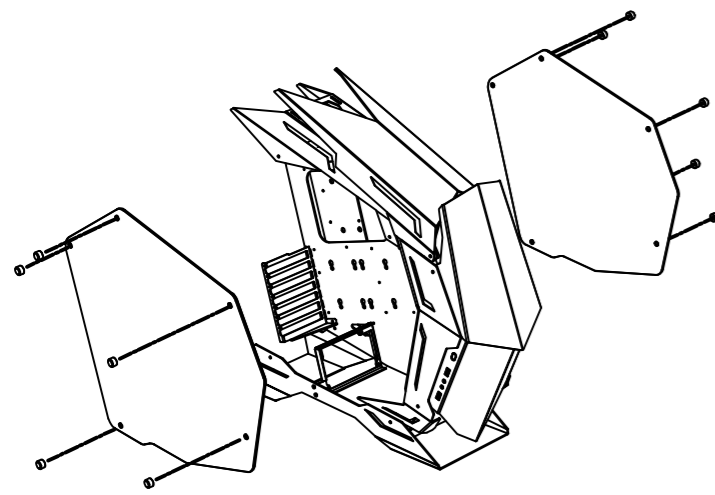| USB 3.0 Connection	HD AUDIO Connection
VBUS SSRX1- SSRX1+ GND SSTX1- SSTX1+ GND D1- D1+ NC / VBUS SSRX2- SSRX2+ GND SSTX2- SSTX2+ GND D2- D2+	PORT 1L AUG GND / PORT 1R PRESENCE / PORT 2R SENSE1_RETURN / SENCE_SEND / PORT 2L SENSE2_RETURN
Power Button Connection	**Hard drive LED Connection**
POWER SW	H.D.D. LED

Product exploded drawing
产品爆炸图

Top cover 上盖
Top pillar 顶柱
360 Fan bracket 360风扇架
HDD bracket 硬盘托架
Mainboard plate 主机板
Small back window/ 小后窗
Left side glass/ 左侧玻璃
Right side glass/ 右侧玻璃
Right decorate plate 右饰板
Upper front plate 上面板
Lower front plate 下面板
Left decorate plate 左饰板
Fan bracket 风扇架
Foot stand 脚架
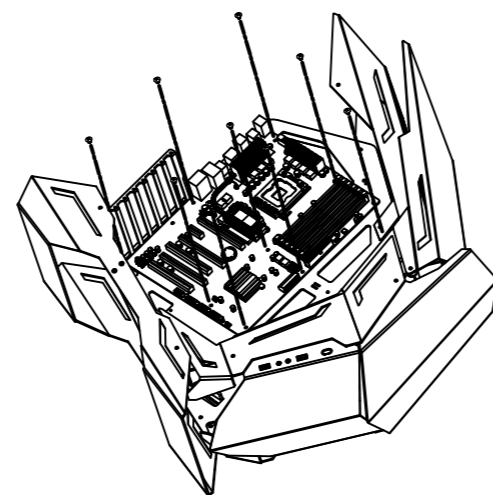PSU bracket 电源架

1 — Side tempered glass / 玻璃侧板

1、拆下左/右玻璃侧板螺丝，可取下左/右玻璃。
Unscrew left/right side plate screws, and take out left/right glass

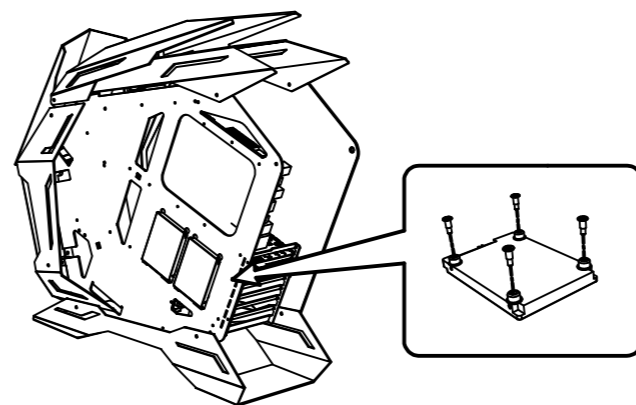## 2 — Install Motherboard / 主板安装

1、把主板放在图示安装区，用9颗螺丝锁好主板。
Fix mainboard with 9 screws on the installation area shown
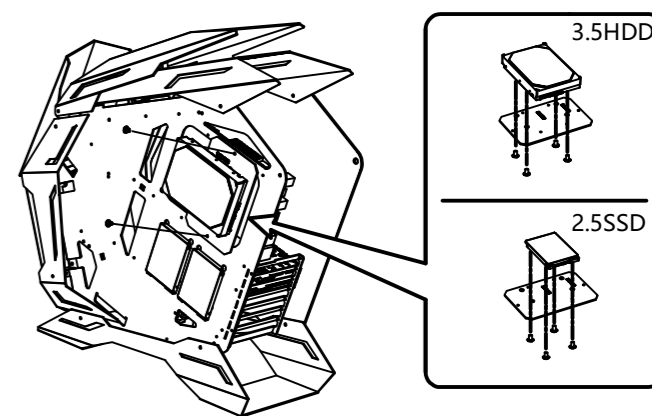
5 — Install 2.5SSD-01 / 硬盘安装-01

1、用《零件盒》螺丝/胶垫/组装好硬盘。
Use screws/rubber mat from accessories box to assemble SSD

2、组好的硬盘插入主机板背部卡槽内。
After assembling SSD, lock it on the back of mainboard plate

6 — Install 3.5HDD-02 / 硬盘安装-02

3.5HDD

2.5SSD
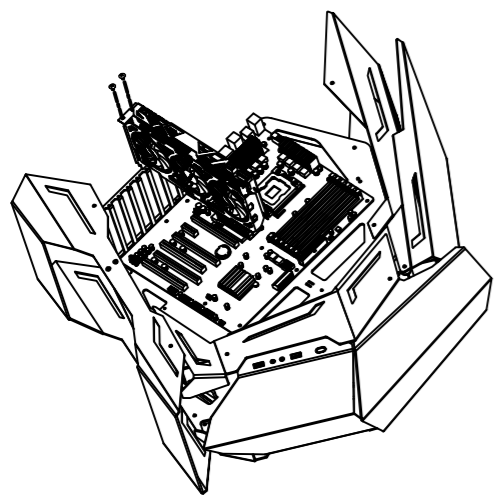
1、拆下硬盘托架。/Remove HDD bracket

2、用4颗螺丝从硬盘托架底部固定住硬盘。
Use 4 screws to fix HDD from HDD bracket bottom

3、固定硬盘后,用螺丝锁在主机板后面。
After fixing HDD, use screws to lock it behind back plate.
（硬盘托架兼容安装3.5HDD/2.5SSD）。
(HDD bracket is compatible with 3.5HDD/2.5SSD)
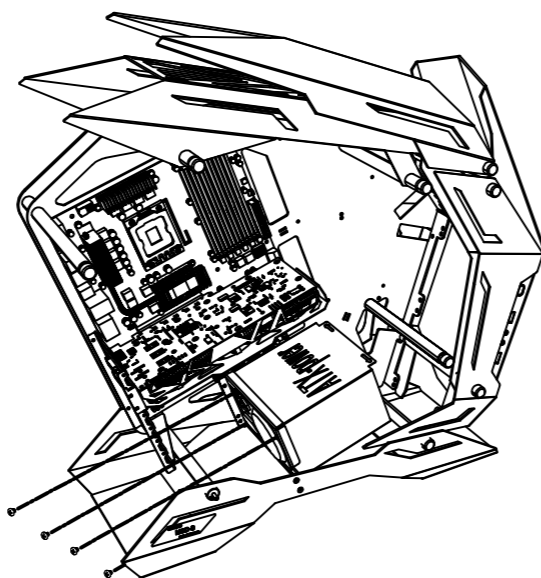
3 — Video Card Installation / 显卡安装

1、显卡插入主板卡槽内。
Insert video card into mainboard slot

2、用螺丝锁主显卡。
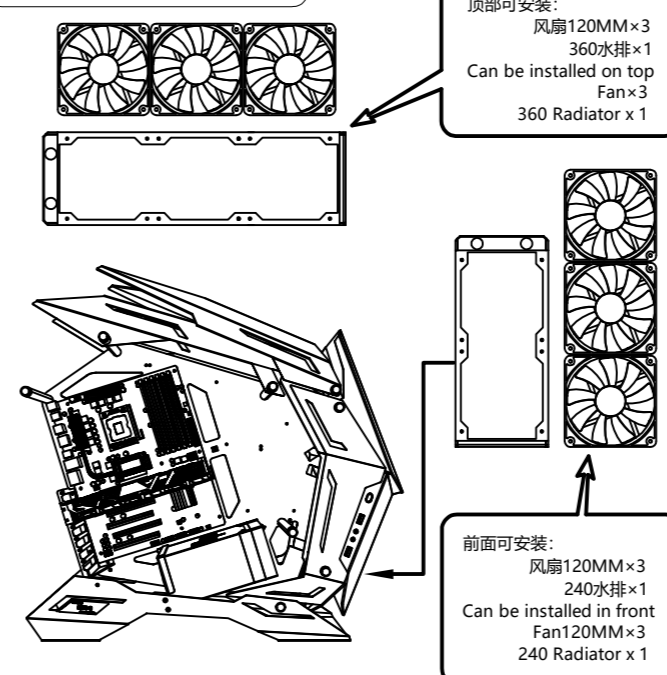Fix video card with screws

4 — Install PSU / 电源安装

1、用4颗螺丝把电源锁在固定板上。
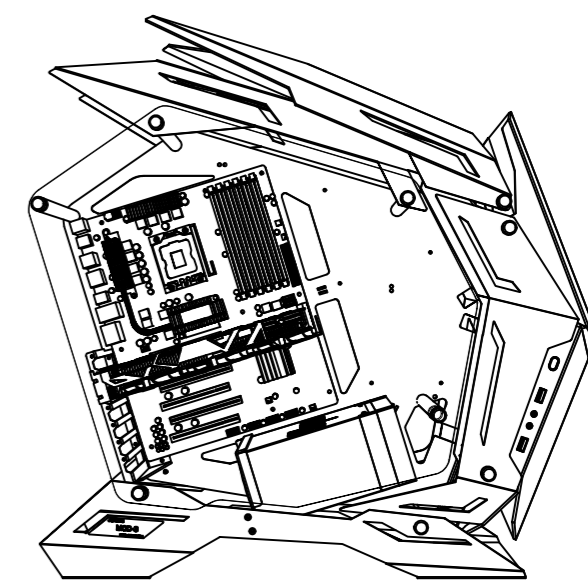Use 4 screws to lock PSU on PSU fixing plate

7 — FAN- Water Cooler / 风扇-水冷

顶部可安装:
风扇120MM×3
360水排×1
Can be installed on top
Fan×3
360 Radiator x 1

前面可安装:
风扇120MM×3
240水排×1
Can be installed in front
Fan120MM×3
240 Radiator x 1

1、顶部风扇支持120MM×3/360水排×1。
Top part supports 120mm x 3 fans

2、前面可安装：风扇120MM×3/240水排×1。
Can be installed in front: fan 120MM × 3 / 240 liquid cooler × 1

Assembling Finished
安装完成